

PLANNED TREE MAINTENANCE

Tree Works Notification		Created By:	
Public Scrutiny		Date:	
Tree Works reference number and schedule title			
Wards included within planned works:			
Abbey		East Chesterton	Queen Ediths
Arbury		Kings Hedges	Romsey
Castle		Market	Trumpington
Cherry Hinton		Newnham	West Chesterton
Coleridge		Petersfield	
Within following Council service areas:			
Highways		Housing	Parks
Size of schedule – based on number of trees included within:			
Small (< 10 trees)		Medium (11 - 50 trees)	Large (> 50 trees)
Brief description of the works			

Tree Works Notification

For tree works submitted under a 'Tree Works Notification' I refer you to Policy GM3 of the Cambridge City Council Citywide Tree Strategy 2016-2026 Part 2:

"All planned tree works will be published on the Council website and through site notices for the community to access at least 20 working days before implementation. The council sees this as an important tool for communicating to the local community about tree work planned for their area and the reasons why the works are necessary." <https://www.cambridge.gov.uk/tree-strategy>

The notification period will run for 20 days from the date of publication of the schedule.

The majority of the works contained within these schedules consists of minor pruning to address health and safety issues, or more significant works to remove trees that are obviously dead, dying or diseased, or replacement planting for trees that have been removed.

A brief outline of the planned works can be found in the table shown above however; full details of the planned works can be found within the attached schedules and maps.

Please note: where trees are due to be felled, these are marked on site with green tape.

Public Scrutiny

For tree works submitted for 'Public Scrutiny' A brief outline of the planned works which we wish to be publicly scrutinised can be found within the attached schedules and maps which will be available for ten working days following the date of publication.

The planned works could involve either removing healthy trees over 75mm in diameter as measured at 1.5m above ground level and/or any tree work or batch of works that will have a significant impact on the landscape character of an area as assessed by an arboricultural officer. This will include crown reductions of over 30% in branch length on trees that have not previously been reduced.

The table above provides details of the works which are open for public scrutiny, please note that some tree works schedules may contain other works in other service areas than those open to this level of scrutiny. The following details only relate to the significant works considered for scrutiny. Please note: where trees are

due to be felled, these are clearly marked on site with green tape.

I refer you to Policy GM5 of the Cambridge City Council [Citywide Tree Strategy 2016-2026 Part 2](#):

“When considering tree works on City Council land, the Council will invite resident and stakeholder comment regarding the following kinds of work:

- a) Any tree work which will have a significant impact on the character of an area.*
- b) Felling healthy trees of over 75mm diameter”*

If you wish to make a comment about any of the works proposed, please submit them via this link: [Comment on a tree work schedule](#). All unresolved objections to tree work subject to public scrutiny will be determined by the relevant Executive Councillor.

Location:

Abbey Pool (PKS)

Site type:

Order no/ref:
Contract/Client Ref:
Item created: 10 June 2022

Priority of works:
Start on/after:
Complete by:

Tree/Item code	Species/Work required	Rate	Quantity	Cost
----------------	-----------------------	------	----------	------

Abbey Pool (ABBEYP), Abbey

Sgl/2 (010444)	Poplar (White) (Populus alba) SSIVY Sever and strip ivy up to 1 metre above ground level		1 tree	
Sgl/3 (010448)	Poplar (White) (Populus alba) RFR Rem - tree for replant		1 tree	0.00
Sgl/7.1 (740060)	Willow (Unspecified) (Salix species) \$WR Recommended Works - see Comments clear fallen tree		1 tree	
Sgl/22 (500424)	Alder (Unspecified) (Alnus species) SSIVY Sever and strip ivy up to 1 metre above ground level		1 tree	
Sgl/22.1 (740064)	Thorn (Hawthorn) (Crataegus monogyna) RT1 Fell or dismantle the tree. Leave stump at 1m above ground level		1 tree	
Sgl/23 (500428)	Willow (Goat) (Salix caprea) COP Coppice leaning self set goat willow		1 tree	0.00
Sgl/34 (500472)	Alder (Unspecified) (Alnus species) SSIVY Sever and strip ivy up to 1 metre above ground level		1 tree	
Sgl/39 (500492)	Willow (Golden Weeping) (Salix x sepulcralis var. chrysocoma) CRT C/R - by reduce 3m below the Pollard points to form new Pollard heads		1 tree	0.00
Sgl/41 (500500)	Aesculus (Horse Chestnut) (Aesculus hippocastanum) SSIVY Sever and strip ivy up to 1 metre above ground level		1 tree	
Sgl/43 (500508)	Maple (Field) (Acer campestre) CLT C/L - to 3-4m over car park SSIVY Sever and strip ivy up to 1 metre above ground level		1 tree 1 tree	0.00

Tree/Item code	Species/Work required	Rate	Quantity	Cost
Sgl/44 (500512)	Aesculus (Horse Chestnut) (<i>Aesculus hippocastanum</i>) SSIVY Sever and strip ivy up to 1 metre above ground level		1 tree	
Sgl/45 (500516)	Aesculus (Horse Chestnut) (<i>Aesculus hippocastanum</i>) SSIVY Sever and strip ivy up to 1 metre above ground level		1 tree	
Sgl/47 (500524)	Willow (Unspecified) (<i>Salix</i> species) COP Coppice		1 tree	0.00
Sgl/56 (500560)	Willow (Unspecified) (<i>Salix</i> species) COP Coppice prune leaving 1m high pegs above coppice head		1 tree	0.00
Sgl/57 (500564)	Poplar (Unspecified) (<i>Populus</i> species) CRT C/R - by 4-5m		1 tree	0.00
Sgl/58 (500568)	Poplar (Unspecified) (<i>Populus</i> species) RT1 Fell or dismantle the tree. Leave stump at 1m above ground level		1 tree	
Sgl/59 (500572)	Willow (Unspecified) (<i>Salix</i> species) CRS C/R - sides by reduce over pool by 3-4m CRHG C/R - height by 5-6m		1 tree 1 tree	0.00 0.00
Sgl/79 (500656)	Alder (Cut Leaved) (<i>Alnus glutinosa</i> 'Imperialis') SSIVY Sever and strip ivy up to 1 metre above ground level		1 tree	
Sgl/80 (500660)	Maple (Field) (<i>Acer campestre</i>) SSIVY Sever and strip ivy up to 1 metre above ground level		1 tree	
Sgl/88 (500692)	Willow (White) (<i>Salix alba</i>) Adjacent to Behind Abbey Pool CRX C/R - to previous reduction points		1 tree	0.00
Sgl/91 (500708)	Willow (White) (<i>Salix alba</i>) Abbey Pool Play Area CRX C/R - to previous reduction points only prune the Pollard knuckles. leave all inner suckers and secondary growth. BRANC Reduce specified branch by reduced the two northern primary branches (allotment side of tree) by 4 -5 metres		1 tree 1 tree	0.00
Sgl/92 (500712)	Willow (White) (<i>Salix alba</i>) Abbey Pool Play Area CLT C/L - to 4m CRX C/R - to previous reduction points only prune the Pollard knuckles. leave all inner suckers and secondary growth		1 tree 1 tree	0.00 0.00

Tree/Item code	Species/Work required	Rate	Quantity	Cost
Sgl/93 (500716)	Willow (White) (Salix alba) Abbey Pool Play Area			
CLT	C/L - to 4m		1 tree	0.00
CRX	C/R - to previous reduction points only prune the Pollard knuckles. leave all inner suckers and secondary growth		1 tree	0.00
IVY	Sever ivy at at base		1 tree	0.00
Sgl/94 (500720)	Willow (White) (Salix alba) Abbey Pool Play Area			
CLT	C/L - to 4m		1 tree	0.00
CRX	C/R - to previous reduction points only prune the Pollard knuckles. leave all inner suckers and secondary growth		1 tree	0.00
Sgl/95 (500724)	Willow (White) (Salix alba) Abbey Pool Play Area			
CLT	C/L - to 4m		1 tree	0.00
CRX	C/R - to previous reduction points also clear zipline. only prune the Pollard knuckles. leave all inner suckers and secondary growth		1 tree	0.00
Sgl/96 (500728)	Willow (White) (Salix alba) Abbey Pool Play Area			
CRP	C/R - repollard only prune the Pollard knuckles. leave all inner suckers and secondary growth		1 tree	0.00
Sgl/111 (500820)	Pine (Scot's) (Pinus sylvestris)			
MUL	mulch		1 tree	0.00
Sgl/112 (500824)	Pine (Scot's) (Pinus sylvestris)			
MUL	mulch		1 tree	0.00
Sgl/113 (536856)	Poplar (White) (Populus alba)			
SSIVY	Sever and strip ivy up to 1 metre above ground level		1 tree	
Sgl/114.1 (740052)	Ash (Common) (Fraxinus excelsior)			
RKR	Rem - tree and kill root young ash sucker growing up against wall of the abbey pool		1 tree	0.00
Sgl/114.2 (740056)	Maple (Field) (Acer campestre)			
RKR	Rem - tree and kill root young field maple sucker growing up against wall of the abbey pool		1 tree	0.00
Sgl/126 (740000)	Poplar (White) (Populus alba)			
SSIVY	Sever and strip ivy up to 1 metre above ground level		1 tree	
Sgl/131 (740028)	Poplar (White) (Populus alba)			
SSIVY	Sever and strip ivy up to 1 metre above ground level		1 tree	

Tree/Item code	Species/Work required	Rate	Quantity	Cost
Sgl/133 (740032) CRT C/R - by 5-6m	Willow (Golden Weeping) (Salix x sepulcralis var. chrysocoma)		1 tree	0.00
Sgl/134 (740024) \$WR	Thorn (Hawthorn) (Crataegus monogyna) Recommended Works - see Comments clear the fallen branch leaning against the wall of the swimming pool		1 tree	
Sgl/137 (740044) SSIVY	Ash (Common) (Fraxinus excelsior) Sever and strip ivy up to 1 metre above ground level		1 tree	
Sgl/138 (740048) SSIVY	Ash (Common) (Fraxinus excelsior) Sever and strip ivy up to 1 metre above ground level		1 tree	

Expenditure code analysis :-

Expenditure code not specified

Schedule item analysis :-

CLT	C/L - to	5 trees @ 0.00
COP	Coppice	3 trees @ 0.00
CRHG	C/R - height by	1 tree @ 0.00
CRP	C/R - repollard	1 tree @ 0.00
CRS	C/R - sides by	1 tree @ 0.00
CRT	C/R - by	3 trees @ 0.00
CRX	C/R - to previous reduction points	6 trees @ 0.00
IVY	Sever ivy at	1 tree @ 0.00
MUL	mulch	2 trees @ 0.00
RFR	Rem - tree for replant	1 tree @ 0.00
RKR	Rem - tree and kill root	2 trees @ 0.00


Contractor:

Total cost: 0.00

Issued by:

Kenny McGregeor

Abbey Pool (ABBEYP), Abbey

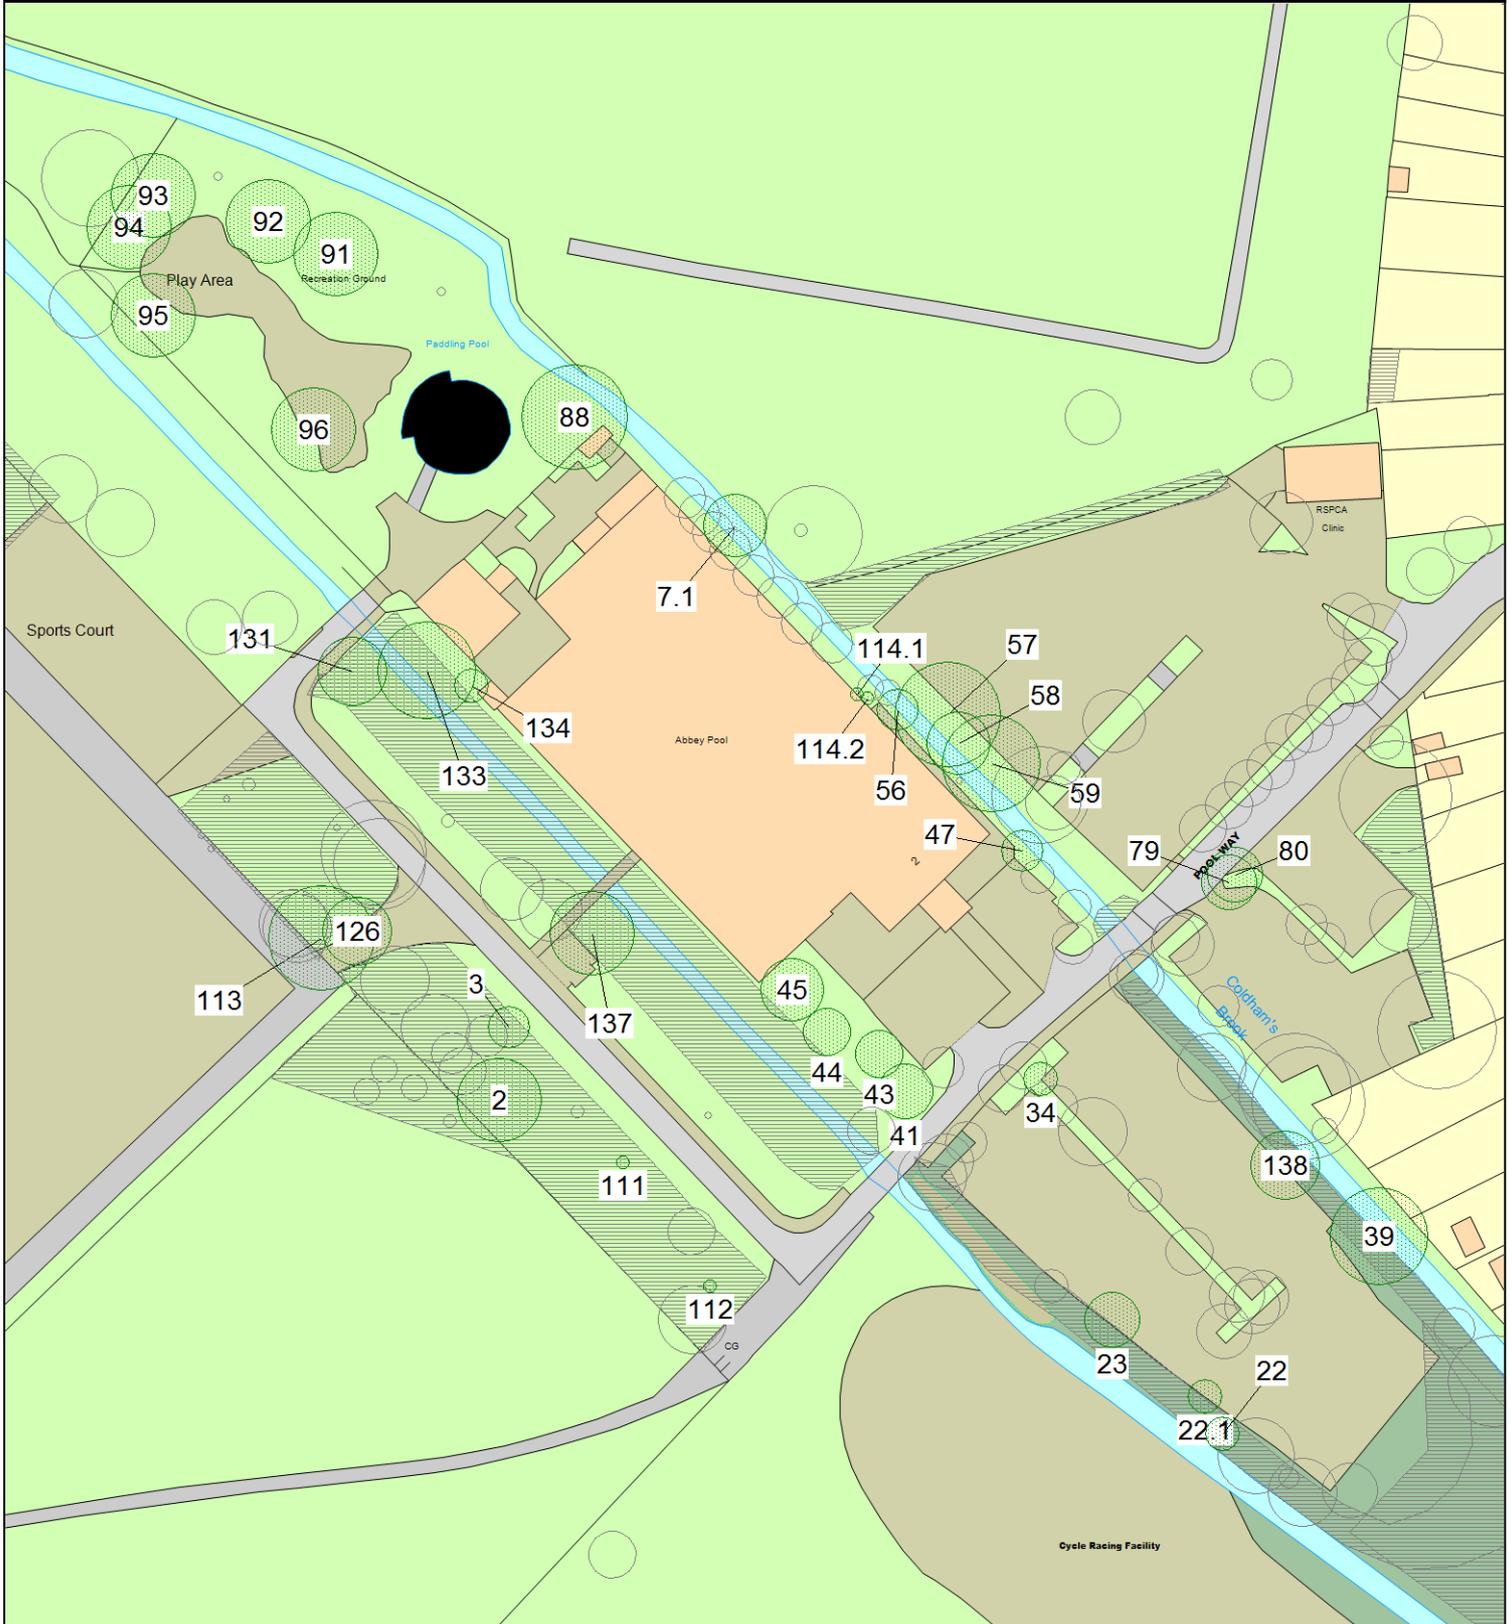

This map is reproduced from Ordnance Survey material with the permission of Her Majesty's Stationery Office (c) Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings." Cambridge City Council (Licence No. 100019730) 2006.